


**Light Emitting Diode Technology “M²D”
High output LED light & Power control system**

GT-1100

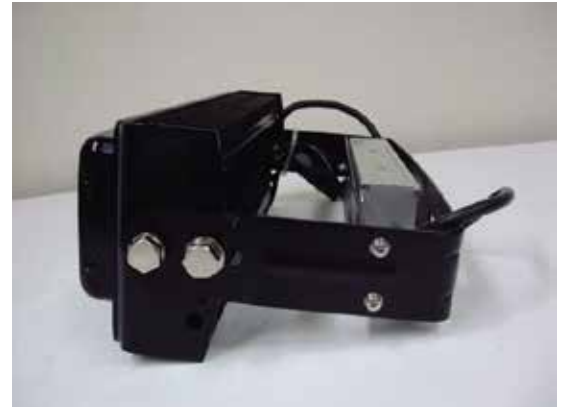

SPECIFICATION

Input voltage	AC90~265V	Luminous Flux (lm)	18,980 lm*
Frequency	50Hz/60Hz	Color Temperature	5000K
Power consumption	150W	Color-Rending Index (Ra)	> 70
Power Factor	0.98/100V 0.95/230V	Operation Environment Temperature	-20~+40°C
Power efficiency	94%	IP	IP65
LED efficiency	126 lm/W	Using time	More then 60000 hours
Beam angle (1/2)	Lens (23°29°) Wide angle 107°	Weight	5.0 Kg

* 1 Hour Measurement after Aging
We will propose specifications that meet your needs. Please feel free to contact us.

Recommended Outdoor Facilities Stadium Tennis Court Parking Soccer Field ...



Address: No. 23, Dan Chu Street, Vietnam - Singapore Industrial Park II,
Hoa Phu Ward, Thu Dau Mot City, Binh Duong Province, Vietnam
Tel: +84-650-3589-553 / Fax: +84-650-3589-550
Mail: info@noa.com.vn / Website: www.noa.com.vn

